



USER GUIDE


FOR RA708 SERIES
WEATHER RESISTANT TELEPHONES

GENERAL

The RA708 type weatherproof telephone from DAC Limited is designed to provide a reliable communications terminal for many arduous communications applications.


The telephone can be connected as an extension, on most types of PBX [see details under 'line connections'] or via a standard BT telephone socket.

MOUNTING OPTIONS




Wall Mounting

Use reducing washers [supplied as part of installation kit] to affix to wall through telephone backplate.



Top of Pole Mounting

Top of pole mounting bracket available from DAC Limited



Pole or Post Mounting


Use pole mounting adaptor bracket [supplied as part of installation kit] and band at required height on pole

LINE CONNECTION

The number of telephones that can be connected to a direct exchange line PBX is limited to the ringer equivalence number [REN] of all the telephones connected, which should not exceed a total value of 4. The REN value of this telephone is 1. In case of doubt please contact your telephone supplier. ***The following information is provided for use by your approved telephone installer or network supplier.***


Terminal Connections

B - Line [B]
A - Line [A]

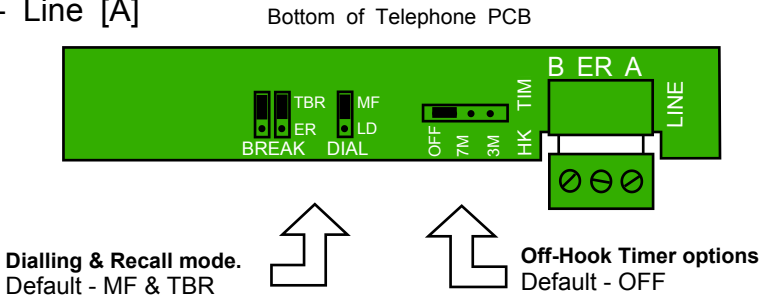

Earth Bonding

The earth bonding point is on the rear of the telephone.

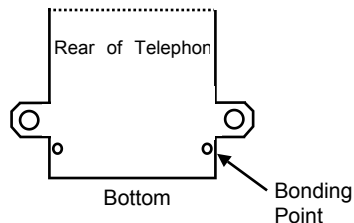

Available options:

- 1 Armoured Cord Handset
- 2 Padlock Hole in door
- 3 Latching Door
- 4 Telephone logo
- 5 Installation kit
- 6 Top of pole mounting kit
- 7 Yellow or Grey colour

Distributor:

DAC Limited, Unit 28 Lomeshaye Business Village, Turner Road
Nelson, Lancashire. UK. BB9 7DR

Tel: +44 (0) 1282 447000 Fax: +44 (0) 845 280 1915

www.daclimited.co.uk